




Compañía Internacional de Telecomunicaciones

SPLITTER 800-2500 MHZ

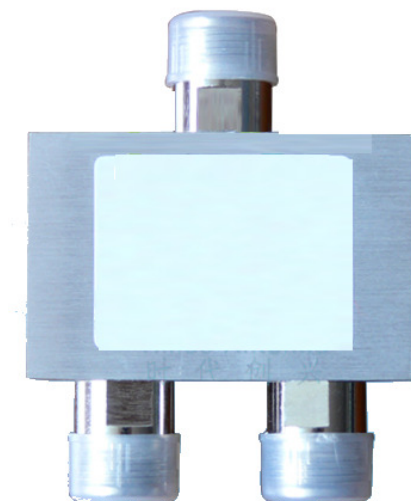

Frequency Range	800-2500MHz
VSWR	≤ 1.28
Insertion loss(including dividing loss)	≤ 3.4
Isolation	≥ 20 -d B
Max power	50-W
Nominal Impedance	50- Ω
Connector	N
Size	60×38×22-MM
Weight	4 kg

Claudio Arrau 0349, Providencia Santiago de Chile

Fono: 6651475 Fax: 6356472

www.citltda.cl